

iPhone 12

iPhone 12 Pro

## Apple Recycler Guide

June 2023

### **Contents**

- 3 About This Guide
- 4 Identification
- 5 Directive 2012/19/EU Annex VII Components
- 6 Safety Considerations
- 9 Recommended Tools
- 10 Disassembly Instructions
- 24 Material Categorization of Output Fractions

### **About This Guide**

Apple Recycler Guides provide guidance for electronics recyclers on how to disassemble products to maximize recovery of resources. The guides provide step-by-step disassembly instructions and information on the material composition to help recyclers direct fractions to the appropriate material recycler.

To conserve important resources, we work to reduce the materials we use and aim to one day source only recycled or renewable materials in our products. A key path to reaching that goal is resource recovery from end-of-life electronics.


Disassembly procedures are intended to be performed only by trained electronics recycling professionals. The recycler is responsible for independently evaluating and ensuring compliance with all applicable environmental, health, and safety laws related to the work. These include but are not limited to laws relating to the management, handling, shipping, and disposal of the outputs of this work as waste and laws in place to ensure the health and safety of all employees who support this work.

For questions or feedback about this guide, email contactesci@apple.com.

**Note:** This guide may show images from other similar models, but the procedures are the same.

### Identification

You can find the model number of the iPhone inside the SIM tray slot.

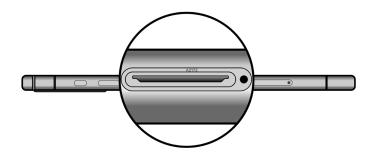

Model numbers: (iPhone 12) A2172, A2402, A2403, A2404 (iPhone 12 Pro) A2341, A2406, A2407, A2408

## Directive 2012/19/EU Annex VII Components

Directive 2012/19/EU Annex VII requirements apply to the following substances and components.

Substance/Component	Apple Part Name	Removal Instructions
Printed circuit board if the surface is greater than 10 square centimeters	Main logic board	Follow steps 1–12
External electric cables	Charge cable	Follow step 1
Battery	Lithium-ion polymer battery	Follow steps 1–5
Cover glass and organic light-emitting diode (OLED) display if the surface is greater than 100 square centimeters	OLED display	Follow steps 1–4
No further substances or components as listed in Annex VII		

### **Safety Considerations**

The recycler is responsible for independently evaluating all activities undertaken by its employees to perform or support the work and ensuring compliance with all applicable health and safety laws related to the work. These include but are not limited to laws relating to the health and safety of all employees who perform or support this work. The recycler is also responsible for evaluating the workspace and ensuring that the area in which the work is to be undertaken is designed using ergonomic best practices and meets all ergonomic requirements to ensure the protection of its employees.

### Personal Protective Equipment

Personal protective equipment should be worn during the entire recycling process.



Wear hand protection



Wear foot protection



Wear eye protection



Wear a mask



Wear protective clothing

### **Battery Safety**

This product uses a lithium-ion polymer battery. Before beginning any disassembly work, ensure that a safe working procedure for handling lithium-ion batteries has been established, which could include discharging the batteries so that they can be more safely managed. The following considerations may also be included:

- Remove anything from your person that could conduct energy, such as jewelry and watches, to avoid electric shock to yourself or the logic board.
- To avoid the potential for thermal runaway and the release of potentially noxious fumes, don't puncture, strike, or crush lithium-ion polymer batteries or devices powered by them.
- Don't throw, drop, or bend the battery.
- Don't expose the battery to excessive heat or sunlight.
- Don't use tools that are sharp or conduct electricity.
- Keep your workspace clear of foreign objects and sharp materials.
- Dispose of batteries according to local environmental laws and guidelines.

#### Workspace safety guidelines

- Use heat-resistant gloves and safety glasses.
- Keep a sand dispenser within arm's reach (2 feet or 0.6 m) on one side of the workstation, not above the workstation. The dispenser should be a wide-mouthed, quick-pour metal container with a flip-top lid or tray that contains 8–10 cups (1.9–2.4 L) of clean, dry, untreated sand.
- Keep the battery at least 2 feet (0.6 m) from paper and other combustible materials.
- Work in an area with adequate ventilation.

#### Handling a thermal runaway

If you notice any of the following signs, a thermal runaway is likely underway, and you should act immediately:

- The lithium-ion polymer battery or a device containing one begins to smoke or emit sparks or soot.
- The battery pouch suddenly and quickly puffs out.
- · You hear hissing or popping sounds.

**Don't** use water or an ABC/CO<sub>2</sub> fire extinguisher on a thermal runaway battery or a device containing one. Water and ABC/CO<sub>2</sub> fire extinguishers will not stop the reaction.

**Do** smother the battery or device immediately with plenty of clean, dry sand, dumped all at once. Timing is critical; the faster you pour all the sand, the faster the thermal runaway will stop.

**Do** leave the room for 30 minutes if the thermal runaway causes any irritation.

**Do** wait 30 minutes before touching the battery. Wear heat-resistant gloves and safety glasses to remove the battery from the sand, or use a touchless thermometer to measure the battery temperature. Only touch the battery when the event has finished.

**Do** dispose of the damaged battery or device (including any debris removed from the sand) according to local environmental laws and guidelines.

### **OLED Safety**

Broken OLEDs must be handled properly to ensure the safety of your employees and mitigate any hazards. Package broken OLEDs in an appropriate container to properly manage the hazards associated with the materials and store only with compatible materials. All waste must be properly classified, packaged, and labeled in accordance with all relevant laws and regulations.

### Hazard Warnings



Broken glass hazard




Rechargeable battery hazard



Chemical inhalation hazard


### **Recommended Tools**

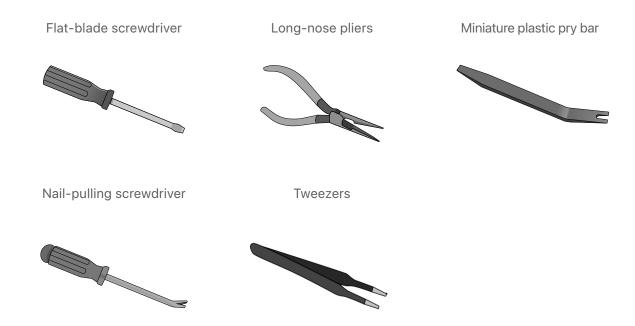

## **Disassembly Instructions**

- 1. Remove the power adapter and charge cable.
  - >> Ensure that the iPhone is turned off.
  - >> Unplug the charge cable.





### 2. Remove the OLED display.




Broken glass hazard




Chemical inhalation hazard

- >> Hold the iPhone at the edge of a counter with the display faceup and the Lightning connector toward the counter edge.
- >> Insert the tool tip into the Lightning connector. Push the handle down to pry the display from the enclosure.

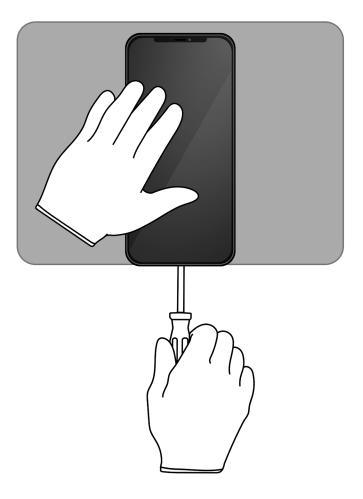




>> Remove the display by hand and set the enclosure aside.

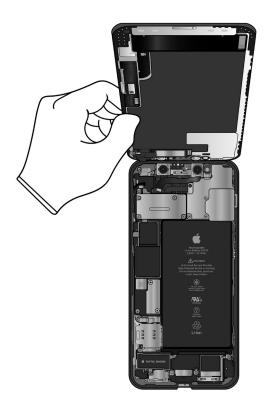


### **3.** Remove the receiver.


>> With the display facedown, pry off the receiver.






>> Pull the ribbon cable off the receiver.




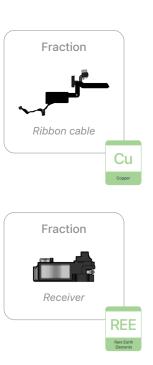

### **4.** Pull the ribbon cables off the OLED display.







# **5.** Inside the enclosure, carefully remove the lithium-ion polymer battery.



Rechargeable battery hazard


- >> Using tweezers, gently peel one of the battery adhesive tabs away from the battery.
- >> Twist the tab around the tweezers until white adhesive appears. Continue twisting until the entire adhesive strip is removed.
- Repeat this process for any remaining battery tabs. Continue with the miniature plastic pry bar if needed.









## **6.** Pry off the speaker.






# **7.** Pry off the right microphone and the Lightning connector.









## **8.** Pry off the Taptic Engine.









## **9.** Pry off the left microphone.









## **10.** Pry off the SIM reader.






# **11.** Remove the SIM card and SIM tray. Separate the SIM card from the SIM tray.








## **12.** Pry off the main logic board.










## **13.** Pry off the rear camera shield.








## **14.** Pry off the rear camera.









## **15.** Pry off the front camera.






## **16.** Pull the remaining ribbon cables off the enclosure.





## 17. Pull the enclosure band off the support plate.








Note: The iPhone 12 and iPhone 12 Pro enclosure bands are made of different materials. The primary target material for the iPhone 12 enclosure band consists of aluminum. The primary target material for the iPhone 12 Pro enclosure band is ferrous.



### **Material Categorization of Output Fractions**

All outputs from this process must be managed, handled, and disposed of in accordance with applicable waste laws and regulations, including but not limited to the Waste Framework Directive and its national enactments in Europe.

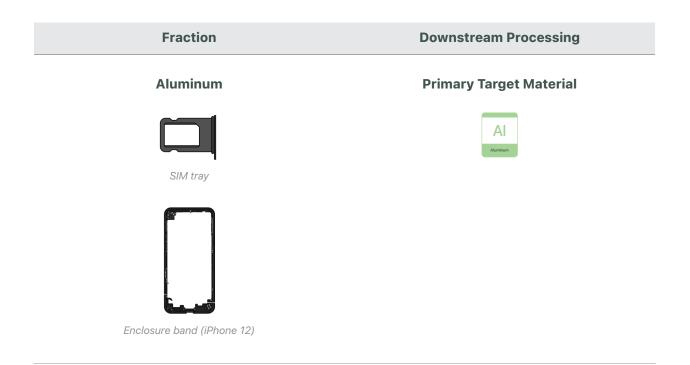





Lithium-ion polymer battery

### **Primary Target Material**



### Fraction

### **Downstream Processing**

#### **Ferrous**



Rear camera shield

### **Primary Target Material**





Enclosure band (iPhone 12 Pro)

#### **Glass**



OLED display

### **Primary Target Material**



### **Potential Additional Materials**











#### **Fraction**

### **Downstream Processing**

### **Logic Boards**



SIM card



Main logic board



Rear camera



Front camera

### **Primary Target Material**



### **Potential Additional Materials**











### **Mixed Electronics**



Charge cable



Right microphone

### **Primary Target Material**



### **Potential Additional Materials**









### **Mixed Electronics (cont.)**




Lightning connector



Left microphone



SIM reader



Ribbon cables



Support plate

### **Fraction**

### **Downstream Processing**

### **Rare Earth Magnets**



Receiver



Speaker



Taptic Engine

### **Primary Target Material**



### **Potential Additional Materials**







